

## Keder Repair for all "Slide-in" Tops


### Preparation

Survey the damaged area and fabric to determine the extent of repair. If the damage is larger than 3ft. to 4ft., it is ideal to replace the entire keder edge.

**\*\*NOTE\*\*** This procedure is for replacing the exterior wrapper around the keder core rod.

### Removing Old Keder Wrapper

1. Remove Pull rings, webbing and/or loopens from keder flange area.
2. Trim the keder wrapper at the actual fabric edge until you are past the worn or damaged point.
3. Working at a right angle, carefully cut around the keder rod, making sure not to score or cut in the keder rod.  
**\*\*HELPFUL HINT:** Using only scissors or sharp knife, work carefully!
4. Strip off old keder wrapper to the trim point.

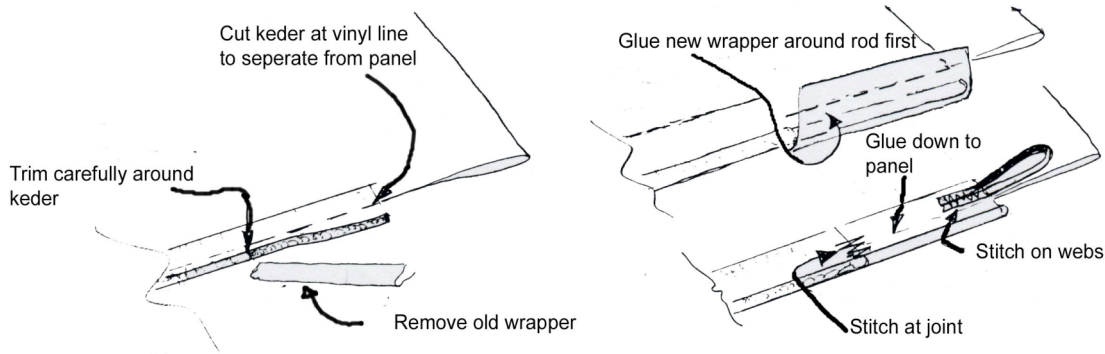

### Affixing New Keder Wrapper

1. Cut new keder wrapper piece to length that covers the exposed area.
2. Hold around existing keder rod and check fit to the roof panel
3. Glue new keder wrapper to rod, using HH66 vinyl cement glue.  
**\*\*HELPFUL HINT:** Be sure to coat both parts first, let dry to a "tacky" surface.
4. Wrap the core first, then close together at inside of core and glue down flanges to existing roof panels.
5. Squeeze down all flat area using a roller. As tight as possible

### Finishing Touch

- ✓ Now that your keder is restored, remove any excess glue and dust the area with talcum powder (baby powder).
- ✓ Sew back any pulls rings, webbing or Loopens in the same position as before.
- ✓ Panels are now **READY FOR USE!**